


Cardolite[®] Ultra LITE 513

Epoxy Reactive Diluent

Technical Datasheet

DESCRIPTION

Cardolite Ultra LITE 513 is a very light color, low viscosity, monofunctional epoxy reactive diluent designed for coatings, adhesives, and other epoxy applications. The long hydrophobic aliphatic side chain of cardanol gives this product a very low viscosity and provides excellent water resistance, flexibility, and thermal shock resistance. High viscosity solvent or solvent free formulations can achieve enhanced workability and higher solids without sacrificing other performance properties using this product.



CHEMICAL STRUCTURE

TYPICAL PROPERTIES

PROPERTY	SPECIFICATION	TEST METHOD
Color (Gardner)	≤ 1	ASTM D1544
Viscosity @ 25°C (cPs)	20 - 35	ASTM D2196
Epoxy Equivalent Weight (EEW) ¹	350 - 425	ASTM D1652-97
Hydrolyzable chlorine (%)	≤ 0.5	ASTM D1726-11
Volatile Loss (% weight)	≤ 0.2	ASTM D2369-98

PROPERTY	TYPICAL VALUE	TEST METHOD
Appearance	Clear liquid	Visual
Density @ 25°C (kg/L) (lbs/gal)	0.95 - 0.98 7.92 - 8.17	ASTM D1475
Flash point	> 270°C / > 518°F	ASTM D93
Recommended Use Level (% of total resin weight)	≤ 20	-
Shelf Life (Months)	12	-

Typical properties are not to be construed as specifications

¹ Based on total product weight

APPLICATIONS


While usable in many epoxy applications, Cardolite Ultra LITE 513 was designed for solvent based and solvent free epoxy systems used in heavy duty marine, protective, industrial, and floor coatings. It can lower the viscosity and bring extra flexibility to coating formulations without sacrificing water resistance and anti-corrosion properties. This product is also useful as an epoxy chain terminator for extending the pot life of systems. As formulations reach higher and higher levels of solids, this product serves as an excellent tool for controlling these critical formulation parameters. Cardolite Ultra LITE 513 can also be used in potable water applications* and has shown very low migration levels compared to other diluents.

* Dependent on country regulations

ADVANTAGES

- Very light color
- Adds flexibility and lowers viscosity while maintaining performance
- Excellent chemical and water resistance
- Increased thermal shock resistance
- Good dilution effect
- Non-toxic
- Compatible with most epoxy resins
- Aids in overcoming epoxy resin and curing agent incompatibilities
- Low volatility and high flash point
- Based on natural, renewable, non-food raw material feedstock

DILUTION PROPERTIES

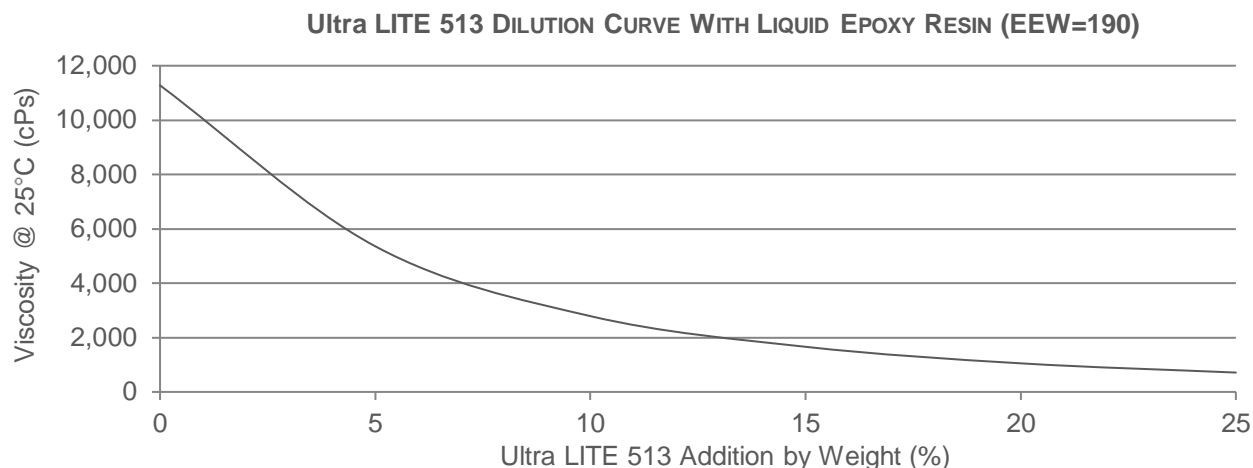

REGULATORY STATUS

Please refer to the material safety data sheet (MSDS). Specific information regarding chemical inventory listing can be obtained from your local sales representative.

SAFETY PRECAUTIONS

Please refer to the material safety data sheet (MSDS). Copies of the MSDS can be requested on the Cardolite website or via your local sales representative.

STABILITY AND STORAGE

Cardolite products may absorb moisture and carbon dioxide when left in open containers, which may result in increased viscosity, discoloration, reduction of reactivity, and/or crystallization of the products. These products should be kept tightly sealed in their original containers when not in use, and stored in a cool, dry place.

CONTACT INFORMATION



<http://www.cardolite.com>

Cardolite Corporation
140 Wharton Road
Bristol, PA 19007
United States of America

Cardolite Specialty
Chemicals Europe NV
Wijmenstraat 21K / 2
B-9030 Mariakerke (Gent)
Belgium

Cardolite Specialty Chemicals
India LLP
Plot No. IP-1 & IP-2, Mangalore
Special Economic Zone
Bajpe, Mangalore 574 142
India

Cardolite Chemical
Zhuhai Ltd.
1248 Ninth Shihua Road
Gaolan Port Economic Zone
Zhuhai, Guangdong 519050
P.R. China

T: +1-800-322-7365

T: +32 (0) 92658826

T: + 91 (0) 824 2888 300

T: +86-756-726-9066

DISCLAIMER & COPYRIGHT

All statements, technical information and recommendations contained herein are based on tests Cardolite believes to be reliable, but the accuracy or completeness thereof is not guaranteed. Actual test method procedures may differ from listed standards; major differences are noted. Limitation of liability and remedy: Purchase or use of these products constitutes an agreement with seller and manufacturer that, if the product proves to be defective or unsuitable, seller's and manufacturer's liability and the exclusive remedy, regardless of tort or contract theory or of incidental or consequential damages shall be to receive, at seller's or manufacturer's option, an equivalent quantity of replacement product or a refund of the purchase price. This datasheet is copyrighted to Cardolite Corporation and may be reproduced but not altered in any way.